
Installation guide


Thank you for choosing and using our products!
After opening the product package, please check the accessories according to the following table and the following figure.

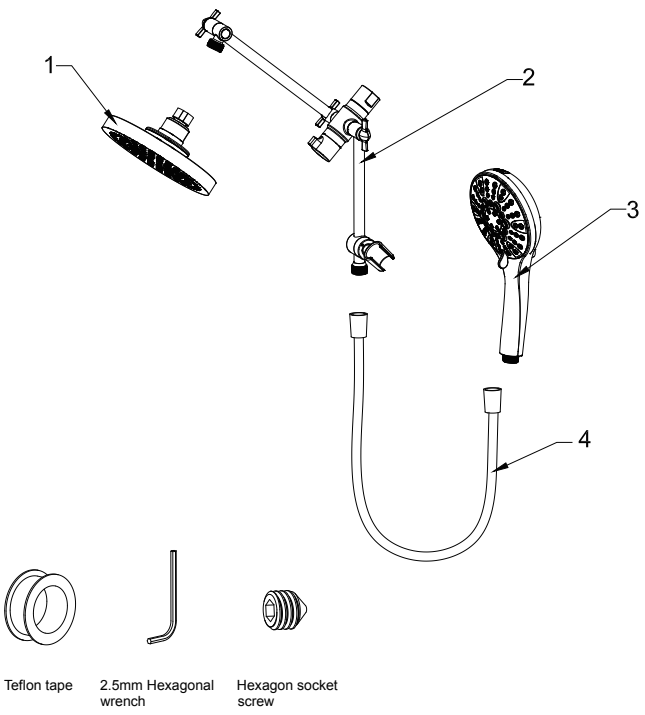



Serial number	Name	Quantity
1	Rain shower head	1
2	Adjustable shower arm integrated diverter and shower holder	1
3	Hand shower	1
4	Shower hose	1


INSTALLATION

1. Remove the old shower head from the shower arm.
2. Clean the threads on the shower arm. There can be some residual thread sealing tape or mineral deposits on the arm, which can be cleaned off. Using mild soap water and an old toothbrush.
3. Wrap the teflon tape tightly around the shower pipe evenly for 4 to 5 wraps clockwise.
4. Connect the female thread of the adjustable shower arm to the existing shower arm, tighten the nut with an adjustable wrench, then tighten the hexagon socket set screws. Adjust the shower arm to the angle desired.
   (Please make sure the rubber washer pre-assembled is at position)

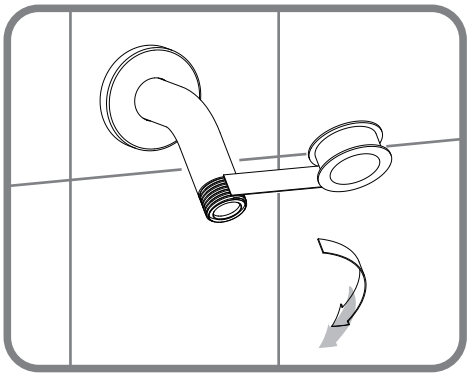

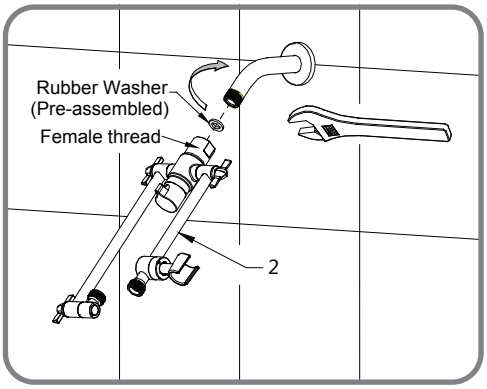


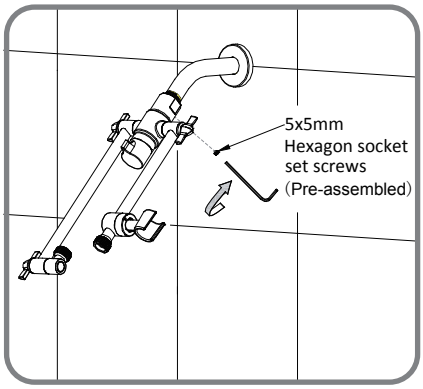

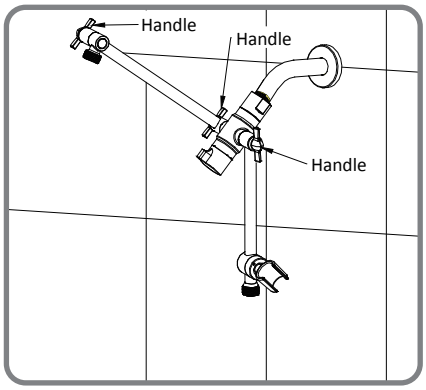

5. Screw the rain shower head onto the adjustable shower arm. Connect the shower hose to the adjustable shower arm and the handheld shower head then put the handheld shower on the holder.

(Please note the rubber washers must be used here at the connections)

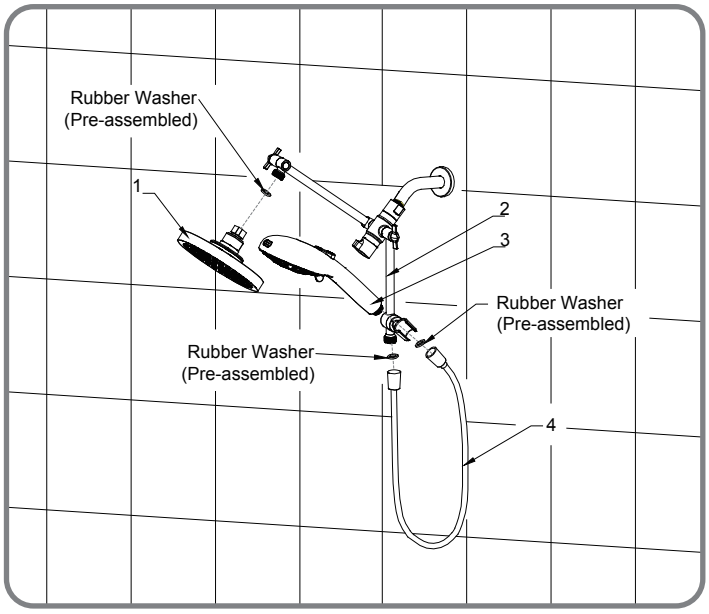



6. Turn on the water and check for leaks. If leaks occur, shut off the water and check the rubber washers at the connection parts and tighten further.

CLEANING&MAINTENANCE

■ To maintain proper working conditions, cleaning your shower head is required when mineral deposits appear on the spray orifices. To clean mineral deposits, gently rub the rubber nozzles on the face of the shower head to dislodge.

■ To clean heavier deposits on your shower head, remove shower head and soak face down in 1-2 cups of white vinegar (use white vinegar only)for about 2-3 hours.

■ Do not clean or rinse any part with harsh chemicals, heavy duty cleaners, or abrasives; this may damage the parts or the finish.

TROUBLESHOOTING

Dilemma 1.
No water flow from installed shower head.
Quick fix: Confirm previous shower washer is not in the J-pipe
Further: Confirm that there is only one washer and that it isn't in the pivot ball.

Dilemma 2.
Low water pressure or missing spray patterns.
Quick fix: Clean shower head in vinegar/water solution(See care&cleaning section)
Further: Clean the water filter.

Dilemma 3.
Leaking at large nut connection.
Quick fix: Confirm only one washer is seated on top of the water filter.
Further: Grate bar of soap across the j-pipe threads to act as a sealant.
Alternative: Confirm water filter is firmly seated in nut.

Dilemma 4.
Shower head is too tight to change angle.
Quick fix: Reinstall shower head to provide additional leverage to change angle of spray.

If you have any questions or concerns about this product, please don't hesitate to contact us. Thank you for choosing us as your Premier Bath Fixtures.
Email: service@brightshowers.com or info@premierbathfixtures.com.