
Installation guide

Thank you for choosing and using our products.
After opening the product package, please check the accessories according to the following table and the following figure(s).
Please note that each of shower heads have been tested with water pressure at our factory for quality assurance,it is normal if water stains appear on the surface,thank you!

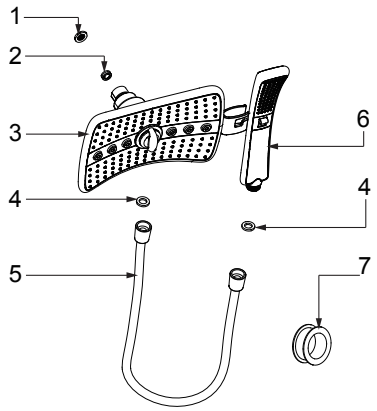

part	name	quantity
1	Rubber washer with Filter (Pre-assembled)	1
2	Flow Restrictor	1
3	Rain shower head	1
4	Rubber Washer (Pre-assembled)	2
5	Shower hose	1
6	Hand shower	1
7	Teflon tape	1

INSTALLATION

1. Remove old shower head from the shower arm.
2. Clean the threads on the shower arm. There can be some residual thread sealing tape or mineral deposits on the arm, which can be cleaned off. Using mild soap and water and/or an old toothbrush
3. Wrap the white teflon tape tightly around the shower pipe evenly for 4 to 5 wraps clockwise.(please refer fig.1)
4. Screw the new Rain shower head onto the end of the shower pipe threads in a clockwise direction.
5. Insert the rubber washers (4) into the two ends of the hose (5), connect with rain shower(3) and hand shower(6), then put the hand shower into the bracket.(please refer fig.2)
6.Turn on the water and check for leaks. If leaks occur, shut off the water and check the rubber washers at the connection parts and tighten further.
[Note: Do not use any part of the shower as a support device.]

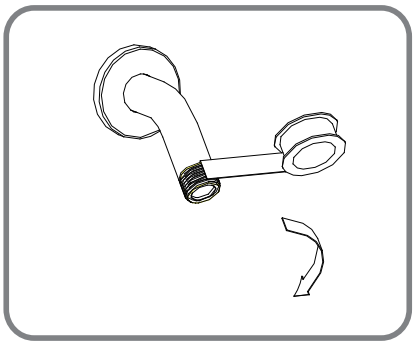


fig.1






fig.2

SHOWER SPRAY SETTING INTRODUCTION


A. rain shower head with two spray settings.

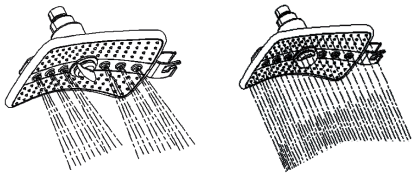


B. hand-held shower head with two spray settings.

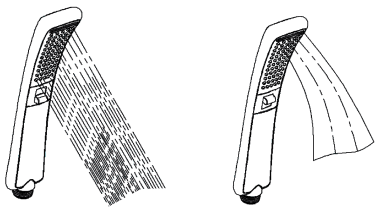

C. There are 3 click positions with the knob on the face plate of the rain shower head,two of them for the two spray settings mentioned above,one for switching water to the hand-held shower head.



When the knob is turned to any middle position between two click positions,you get a mixed spray, either the combination of the two spay settings of the rain shower head,or one of the rain shower spay with the hand-held spray as below:

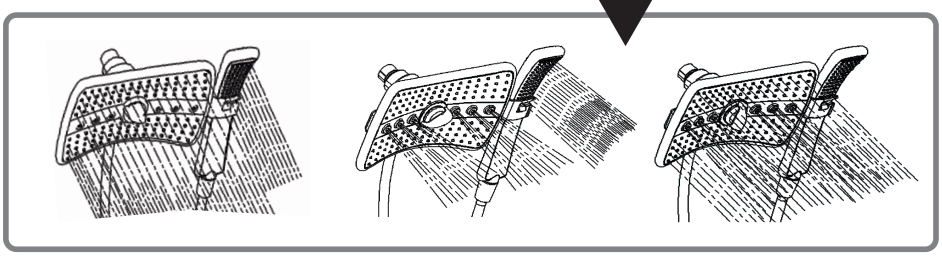

CLEANING&MAINTENANCE

■ To maintain proper working conditions,Cleaning your shower head is required when mineral deposits appear on the spray orifices.To clean mineral deposits,gently rub the rubber nozzles on the face of the shower head to dislodge.

■ To clean heavier deposits on your shower head,remove shower head and soak face down in 1-2 cups of white vinegar(use white vinegar only)for about 2-3 hours.

■ Do not clean or rinse any part with harsh chemicals,heavy duty cleaners,or abrasives;this may damage the parts or the finish.

TROUBLESHOOTING

Dilemma 1.

No water flow from installed shower head.

Quick fix: Confirm previous shower washer is not in the J-pipe

Further: Confirm that there is only one washer and that it isn't in the pivot ball.

Dilemma 2.

Low water pressure or missing spray patterns.

Quick fix: Clean shower head in vinegar/water solution(See care&cleaning section)

Further: Clean the water filter.

Dilemma 3.

Leaking at large nut connection.

Quick fix: Confirm only one washer is seated on top of the water filter.

Further: Grate bar of soap across the j-pipe threads to act as a sealant.

Alternative: Confirm water filter is firmly seated in nut.

Dilemma 4.Shower head is too tight to change angle.

Quick fix: Reinstall shower head to provide additional leverage to change angle of spray.

bright showers

If you have any questions or concerns about this product, please don't hesitate to contact us. Thank you for choosing us as your Premier Bath Fixtures.
Email: customersupport@brightshowers.com